


**KYORITSU JAPAN Digital Clamp Meters**  
[WWW.kew-ltd.co.jp](http://WWW.kew-ltd.co.jp) [WWW.melcobuda.co.yu](http://WWW.melcobuda.co.yu)  
**MODEL 2002R TRUE RMS- Realan RMS**

- Može meriti velike struje do 2000 AC .
- Peak hold funkcija.
- 55mm-otvor mernih kljesta.

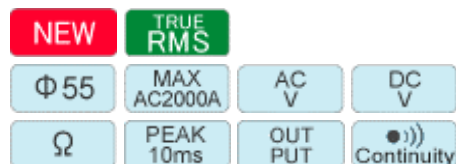

CE

AC A Naizmanicna struja	400A (0~400A) ±1.5%rdg±3dgt [45~65Hz] ±2.5%rdg±3dgt [40Hz~1kHz] 2000A (0~1500A) ±2%rdg±5dgt [45~65Hz] ±3%rdg±5dgt [40Hz~1kHz] 2000A (1501~2000A) ±4%rdg [50/60Hz]
AC V Naizmenicni napon	40/400/750V ±1%rdg±2dgt [45~65Hz] ±1.5%rdg±3dgt [40Hz~1kHz]
DC V jednosmerni napon	40/400/1000V ±1%rdg±2dgt
Ω Otpor	400Ω/4k/40k/400kΩ ±1.5%rdg±2dgt
Zvucnik kontinuiteta	Zvucni signal ispod 50 oma±35Ω
Izlazni napon za rekorder	400/2000A DC400mV/200mV
Max mereni precnik kabla	Ø55mm max.
Sigurnosni standard	IEC61010-1 CAT.III 600V CAT.II 1000V IEC61010-2-031 IEC61010-2-032
Frekvencijski raspon	40Hz~1kHz
Maksimalno naponsko opterecenje	5550V AC do 1 minute
Napajanje	R6P(AA)(1.5V) × 2komada alkaline

Dimenzije	247(L) × 105(W) × 49(D)mm
Tezina	470g approx.
dodatci	<a href="#">7107</a> (Test kablovi) <a href="#">8201</a> (Output konektor) 9094 (Zastitna torba) R6P(AA) × 2 komada baterije Instruction Manual
Opcionalni dodatci koji se posebno narucuju	<a href="#">8004/8008</a> (Multi-Tran do 3000 Ampera ) <a href="#">7014</a> (Output Cord)