

POWER METER




KEW 6305 NEW
TRUE RMS Bluetooth

CE

Power Meter 6305	
Wiring connections	1P2W, 1P3W, 3P3W, 3P3W3A, 3P4W
Measurements	Voltage, Current, Frequency, Active power
Parameters	Apparent power, Reactive power, Active energy, Apparent energy, Reactive energy, Power factor (cos θ), Neutral current, Demand
Voltage range[RMS]	150.0/300.0/600.0V
Voltage accuracy	±0.2%rdg±0.2%f.s. (sine wave, 45-65Hz)
Current range[RMS]	10.00/50.00/100.0/250.0/500.0A/Auto (with clamp sensor MODEL8125)
Current accuracy	±0.2%rdg±0.2%f.s. + Accuracy of Clamp sensor (sine wave, 45~65Hz)
Communication Interface	USB, Bluetooth
PC Card type	SD card
Power supply	AC100-240V (50/60Hz) / LR6×6
Dimensions / Weight	175(L)×120(W)×65(D)mm / 800g Approx.

POWER QUALITY ANALYZER

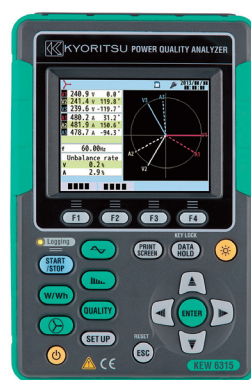

KEW 6315 NEW
TRUE RMS Bluetooth

Power quality and power consumption are simultaneously recordable

CE

Power Quality Analyzer 6315	
Wiring connections	1P2W, 1P3W, 3P3W, 3P3W3A, 3P4W
Measurements & Parameters	Simultaneous recording Voltage: 600/1000V ±0.2%rdg.±0.2%f.s., Current: 500mA-3000A ±0.2%rdg.±0.2%f.s. +Clamp sensor accuracy, Active power, Reactive power, Apparent power, Frequency, Energy, Power factor (cosθ), Demand, Harmonics, Quality (Swell/Dip/Instantaneous stop, Transients, Inrush Current, Unbalance Rate, Flicker)
Display	320× 240(RGB) Pixels, 3.5- inch Color TFT display
Communication Interface	USB, Bluetooth
PC Card type	SD card
Applicable standards	IEC61000-4-30 Class S
Power supply	AC100-240V (45-65Hz)/LR6×6
Dimensions / Weight	175(L)×120(W)×68(D)mm / 900g Approx.

LOGGERS



MODEL 5001 TRUE RMS
The Leakage current is recorded by 3ch input
60,000 data is recorded

5001	
Communication Interface	USB
Power supply	LR6 × 6
Dimensions (L)×(W)×(D)mm	111×60×42mm
Weight (Approx.)	315g

CE



KEW 5020 KEW 5010 TRUE RMS
3 channel inputs for the simultaneous recording of Leakage Current, Load Current and Voltage

5010/5020	
Recording mode	Normal, Trigger, Capture, Power quality analysis (5020 only)
Communication Interface	USB
Power supply	External supply DC9V/LR6×4
Dimensions (L)×(W)×(D)mm	111×60×42mm
Weight (Approx.)	265g

CE

SENSORS

	Load current			Load current(For Power Meter)					
	8121	8122	8123	8124	8125	8126	8127	8128	8129
Appearance									
Conductor size(MAX.mm)	φ24	φ40	φ55	φ68	φ40	φ40	φ24	φ24	φ150
Rated current(AC)	100A	500A	1000A	1000A	500A	200A	100A	50A	3000A

	Leakage current			Leakage & Load current			Voltage
	8141	8142	8143	8146	8147	8148	8309
Appearance							
Conductor size(MAX.mm)	φ24	φ40	φ68	φ24	φ40	φ68	-
Rated current(AC)/voltage(AC)	1000mA	1000mA	1000mA	30A	70A	100A	600V

Safety Warnings : Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

For inquires or orders :



KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan
Phone: +81-3-3723-0131
Fax: +81-3-3723-0152
E-mail: info-eng@kew-ltd.co.jp

<http://www.kew-ltd.co.jp>

