

*Diferencijalna merna kljesta
ostljivosti 0,1mA - 100A AC*

KEW by Melco Buda



KEW 2434


Osetljivost od 0,1mA AC

Frekventni filter

Data Hold

Automatsko gasenje

| Funkcija | opseg | preciznost |
|------------------------------|---|----------------------|
| Struja AC (50 / 60Hz) | 400mA / 4 / 100A | ± (2% rdg + 4Digits) |
| Struja AC (Wide) | 400mA / 4 / 100A | ± (2% rdg + 4Digits) |
| Max. mereni kabal | Ø 28mm | |
| Frekvencija | 40 - 400Hz | |
| Max. naponsko preopterećenje | 3700V AC do 1 Minute | |
| Sigurnosni Standard | IEC 61010-1 CAT III 300V, IEC61010-2-032 | |
| Baterije | R03 (AAA) (1,5V) x 2 | |
| Gewicht | 220g | |
| Dimenzije | 169 x 75 x 40mm | |
| Dodatci | Kablic za fiksiranje oko ruke, kuciste I baterije, uputstvo | |

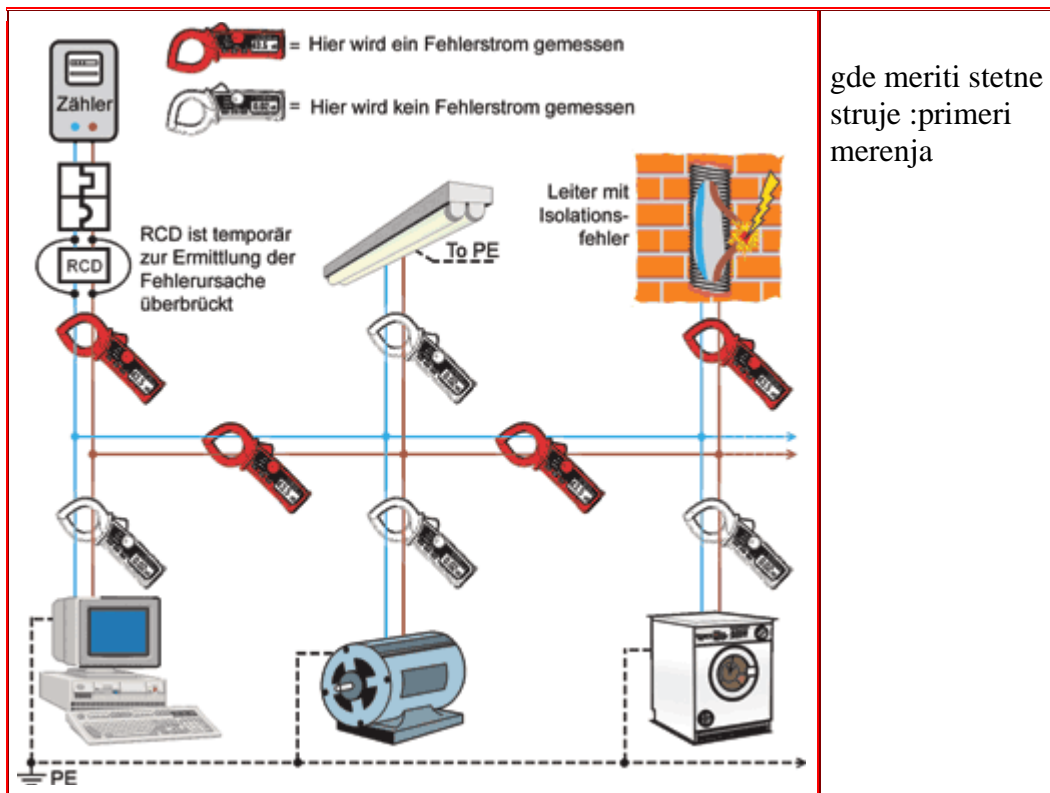

gde meriti stetne
struje :primeri
merenja